




Dart Light (ULD12VD) Specification Sheet

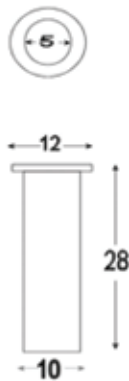

Specification

Housing:

316- marine grade stainless steel

Lens:

Glass Lens

Lamp:

One 5mm Radial Nichia LED. One Pair Consumes ½ Watt (must be fitted in pairs).
Available in -

Cabling:

Fitted with one one metre cable designed to connect to an **In-Line X Connector** or **In-Line Converter**. *Darts must be connected in pairs.*

Warranty:

24 months from date of purchase

Certification:

IP67 Connectors (male-female 2 pin)
CE Approved
RoHS Compliant


Photometric Data:

See Nichia Data Sheet For NSPW 5mm Range





Installation Instructions

1. A qualified electrician must be used to hard wire the power supply to mains electricity. The box should be wall mounted using the fixing holes with the glands facing down.



2. Dart lights must be installed in pairs using a dart in-line X Connector to connect one pair, or In-Line Converter to connect three pairs.

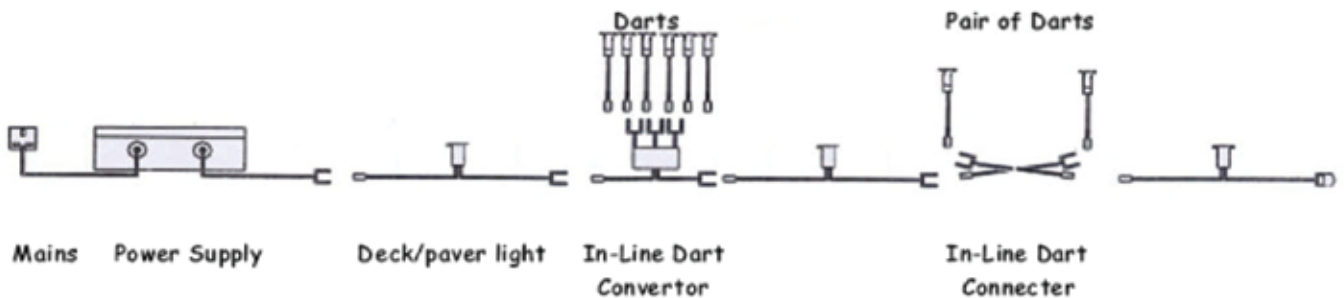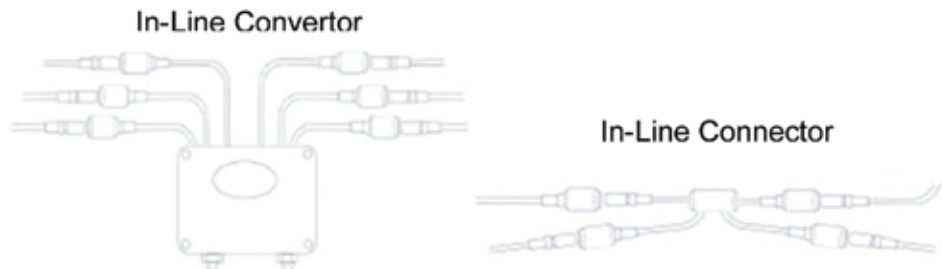

3. When the final light is fitted in place you will have one open ended female connector. To avoid corrosion and ingress place the cap supplied on the power supply unit, on the open end.