



Deck / Paver Lights (ULD) Specification Sheet



Specification

Housing:

316- marine grade stainless steel, available with a smooth or threaded body. Round and square profile available

Lens:

Solid UV stabilised lens available in Clear or Frosted

Lamp:

Two 5mm Radial Nichia LEDs. Consumes ½ Watt. Available in -

Cabling:

Two one-metre cables attached with male/female connectors

Warranty:

24 months from date of purchase

Certification:

IP68 Light Fitting
IP67 Connectors (male-female 2 pin)
CE Approved
RoHS Compliant


Photometric Data:

See Nichia Data Sheet For NSPW 5mm Range.




Installation Instructions

1. A qualified electrician must be used to hard wire the power supply to mains electricity. The box should be wall mounted using the fixing holes with the glands facing down.

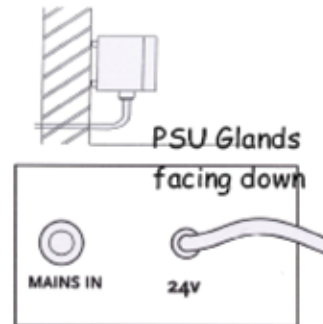

2. Position deck/paver lights and connect together in a simple 'daisy-chain' fashion connecting the male connectors to the female connectors ensuring that the external nibs on the connectors touch. 'Y' splitters and extension cables should be used where necessary.

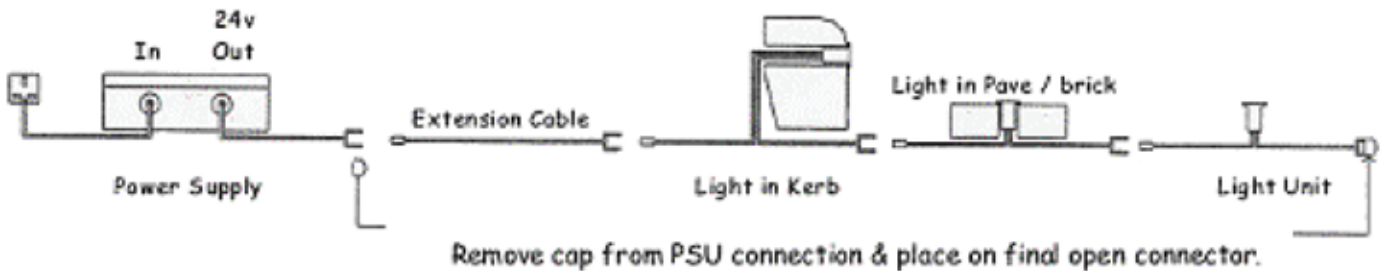

3. When the final light is fitted in place you will have one open ended female connector. To avoid corrosion and ingress place the cap supplied on the power supply unit, on the open end.